


# NEO 55



- PROTECTING FAIRING
  - AIRTIGHT FIREPLACE/INSERT
  - FRAME INCLUDED
- Nominal output : 6 kW
  - Power modulation : 3 to 10 kW
  - Maximum length of the logs : 33 cm
  - Efficiency: 80 %
  - Heating surface : 50 to 120 sq.m.
  - Clean glass system
  - Removable smoke deflector
  - External air intake
  - Warm air distribution set included
  - Optional turbine
  - Eco Design / Energy class A+

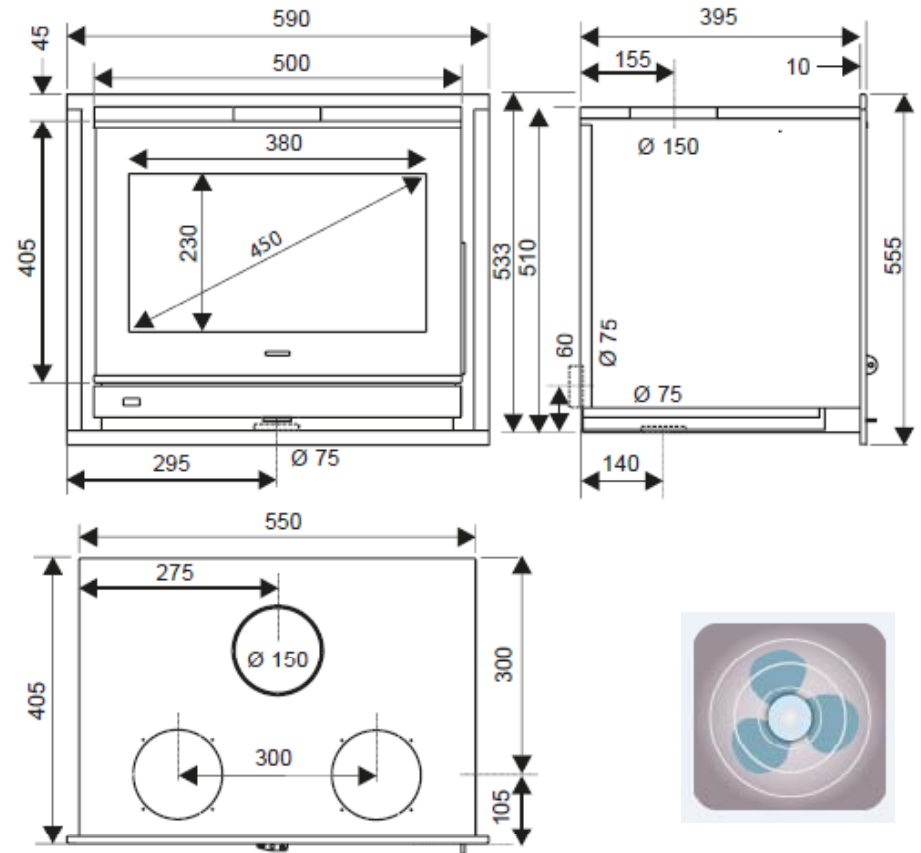

DIMENSIONS L x H x W (cm) : 59 x 55,5 x 40,5  
SMOKE FLUE DIAMETER : 150 mm

