


Néo 76 16/9ème



- PROTECTING FAIRING
- AIRTIGHT FIREPLACE/INSERT
- FRAME INCLUDED

- Nominal output : 10 kW
- Power modulation : 7 to 14 kW
- Maximum length of the logs : 50 cm
- Efficiency: 78 %
- Heating surface : 80 to 200 sq.m.
- Clean glass system
- Removable smoke deflector
- Externl air intake
- Warm air distribution set included
- Optional turbine
- Eco Design

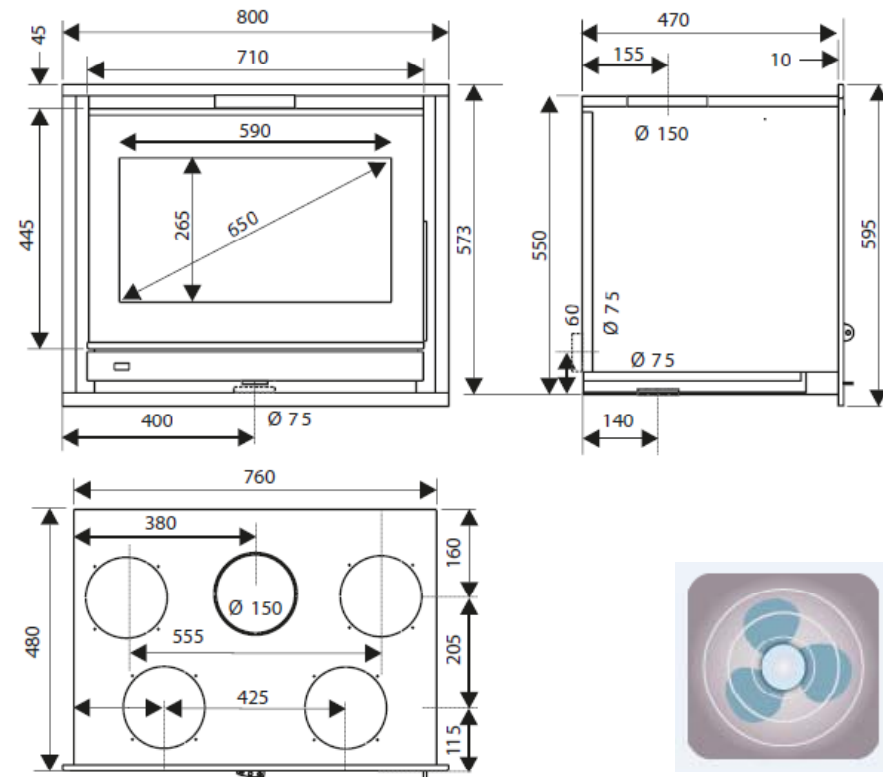

DIMENSIONS L x H x W (cm) : 80 x 59,5 x 48
SMOKE FLUE DIAMETER : 150 mm